



LeciTrailer

CURTAIN SIDER




LECITRAILER, S. A.

C.º de los Huertos, s/n.
Apartado de Correos 100
E-50620 CASETAS
(Zaragoza) España

Teléfono +34 976 462 121
Fax +34 976 773 914

E-mail: lt@lecitrailer.es

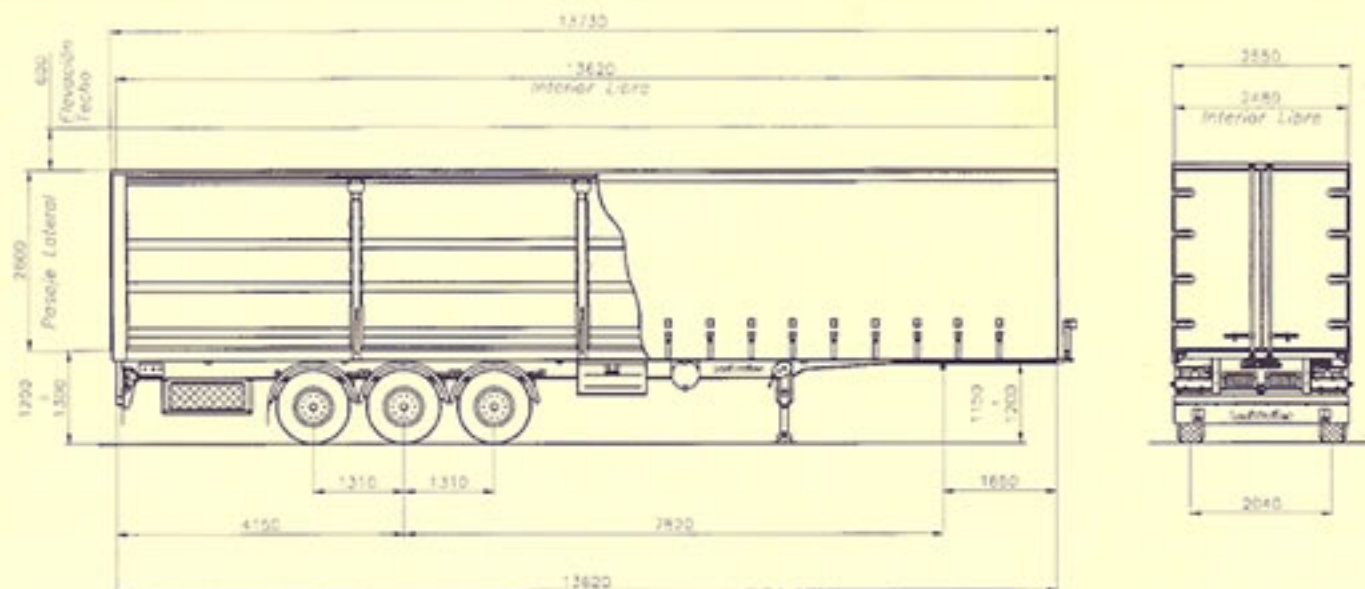

Lecitrailer

CURTAIN SIDER Model: LTP 3 ES

GVW: 34.000 kgs. Tare weight (aprox): 6.950 kgs.

Useful dimensions: Length 13.620 mm / Width: 2.480 mm.

Side access: From 2.600 mm up to 2.700 mm + Interior height: From 2.700 up to 2.800 mm.

Fifth wheel height: From 1.100 up to 1.200 mm.

STRUCTURE: Longitudinal main I-beams, IPN-80 crossmembers, 400 mm spacing and side rave.

Gooseneck section as per ISO 1760 normas, 120 mm height. The whole on special ST-52.3 steel.

AXLES / SUSPENSION: Integral BPW running gear with - 3 x 9 Tons BPW (drum or disc brakes) axles, BPW air suspension, Up & Down valve.

TYRES: (7) Seven complet tyres, including spare, dimension: 385 / 65 R 22.5 MICHELIN.

INSTALLATIONS: "Fully protected on PVC pipes".

ELECTRIC: 24 V., 2 plugs, 7 Poles. Side marker lighth - Leds.

BRAKES: As per CEE normas / A.B.S.: In one axle, VCS 2 S / 2M.

KING - PIN: 2" JOST, E - 200 - S, with articulate pads.

ACCESSORIES: Rubber mudguards, Wheel set key, Basket spare wheel support, Wheel blocks, (8) Eight paires lashing rims, Aluminium side guards.

LOADING FLOOR: 30 mm WISATRANS Schaumann hard wooden floor.

FINISH: The whole steel structure is subjected to a shotblasting process (SA 2 1/2), primer coat and finishing a double component Polyurethane acrylic. Ral tonality to be chosen.

CURTAIN SIDER & SLIDING ROOF:

Steel structure with anti-rust treatment.

Head board made of folded plate with rotating tarpoulin tensor - Designed for 34 Europalettes.

300 mm height protection galvanized plate at head board interior.

Full heigth rear doors with integrated locking bars and flathinges.

Sliding roof with incorporated rear header.

Sliding posts (3) three pairs. Total of (4) four rows Alu stacked planks.

Side curtains 900 gr/m² with stainless steel buckles, front tensioning ratchet.

Roof tarpouyfin in 600 gr/m².

Accesories: Large toolbox, Water barrel, Lashing ratches between side posts, Full length side rubber buffer between rave and side tarpoulin, Rear buffers, Rear acces ladder, Rubber mudflaps.

Colours: Head board, Posts, Rear frame and doors - Ral tonality to be choosen.

Roof tarpoulin: White. Side tarpoulin: To be choosen.

OPTIONS:

Coil carrier

Mega structure 80 mm goosneck section

Axles - disc brakes

Lifting axle

Hydropneumatocal lifting roof.

Palette carrier.

Aluminium side boards 800 mm.